

Panasonic


HHR200SCP

Cylindrical 4/5SC size (HR23/34)


P type

Dimensions (with tube)


(mm)

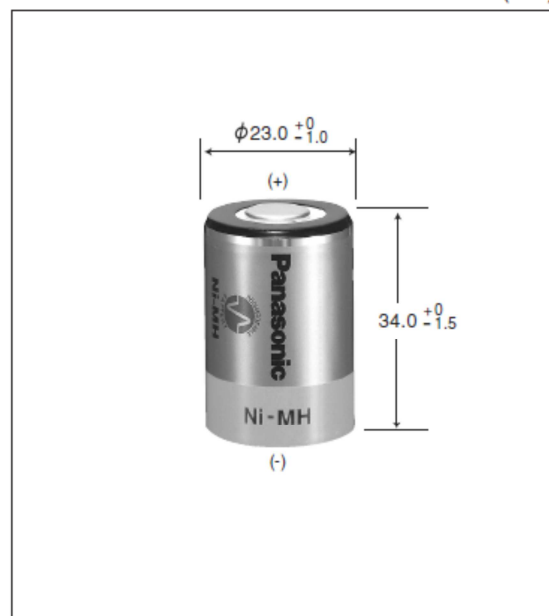

Typical charge characteristics

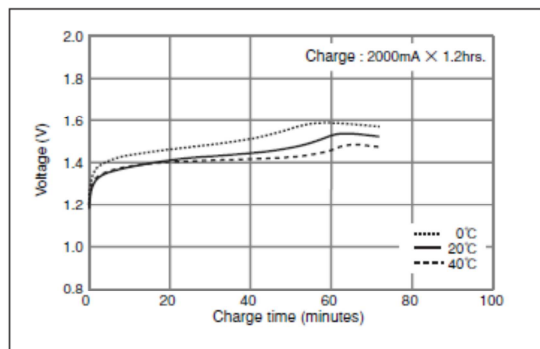

Typical discharge characteristics

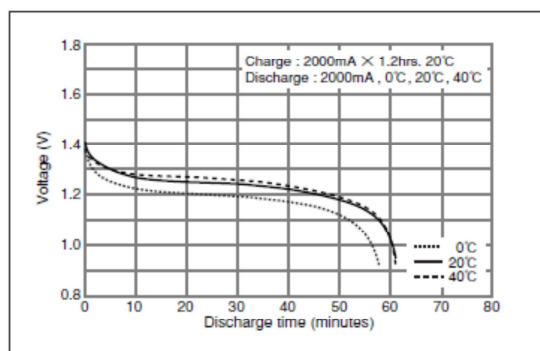

Specifications


Diameter	23.0+0 / -1.0mm
Height	34.0+0 / -1.5mm
Approximate Weight	42g

Nominal Voltage		1.2V	
Discharge Capacity ^{*1}	Average ^{*2}	2100mAh	
	Rated (min.)	1900mAh	
Approx. Internal impedance at 1000Hz at charged state.		5m Ω	
Charge		Standard	200mA X 16hrs.
		Rapid	2000mA X 1.2hrs.
Ambient Temperature	Charge	Standard	0℃ to 45℃
		Rapid	10℃ to 40℃
	Discharge		-10℃ to 65℃
	Storage	<1 year	-20℃ to 35℃
		<3 months	-20℃ to 45℃
		<1 month	-20℃ to 55℃

^{*1} After charging at 0.1It for 16 hours, discharging at 0.2It.

^{*2} For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

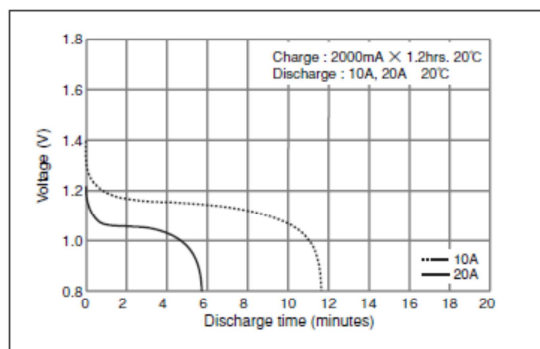

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

Nickel Metal Hydride Battery

2004/01

For further information please contact us +48 42 672 42 02 | office@bto.pl | www.bto.pl | www.bto.net.pl
O szczegóły prosimy pytać nasz dział techniczny +48 42 672 42 02 | office@bto.pl | www.bto.pl | www.bto.net.pl
Producent zastrzega sobie prawo do dokonywania zmian w specyfikacji niniejszego produktu