


Specifications

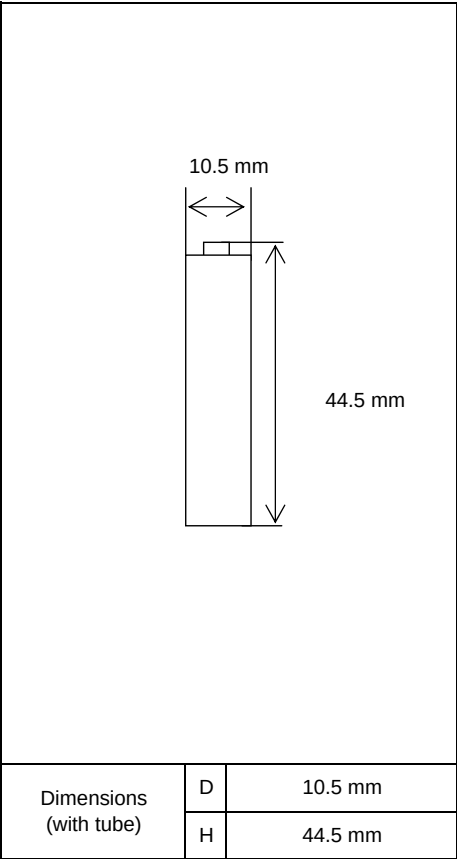


|                                                                    |                           |                           |
|--------------------------------------------------------------------|---------------------------|---------------------------|
| Type : Nickel-Metal Hydride Battery                                |                           | Size : AAA Consumer Type  |
| Capacity <sup>1)</sup>                                             | Typical                   | 600mAh                    |
|                                                                    | Minimum                   | 550mAh                    |
| Nominal Voltage                                                    |                           | 1.2V                      |
| Charging Current x Time                                            | Fast Charge <sup>2)</sup> | 550mA x about 1.1h        |
| Ambient Temp.                                                      | Charge Condition          | Fast Charge <sup>2)</sup> |
|                                                                    | Discharge Condition       | 0°C - 40°C                |
|                                                                    | Storage Condition         | 0°C - 50°C                |
|                                                                    |                           | Less than 90days          |
| Storage Condition                                                  | Less than 1year           | -20°C - 40°C              |
|                                                                    |                           | -20°C - 30°C              |
| Internal Impedance <sup>3)</sup><br>(after discharge to E.V.=1.0V) |                           | Approx. 40mΩ (at 1000Hz)  |
| Weight <sup>4)</sup>                                               |                           | Approx. 13 g              |
| Size <sup>4)</sup> : (Diameter) x (Height)                         |                           | 10.5(D) x 44.5(H) mm      |

1)Single cell capacity under the following condition.  
Charge : 80mA×16h, Discharge : 160mA(E.V.=1.0V) at 20°C  
2)Use recommended charging system.  
3)After a few charge and discharge cycles under the above 1) condition.  
4)With tube.

Typical Characteristics

Charge

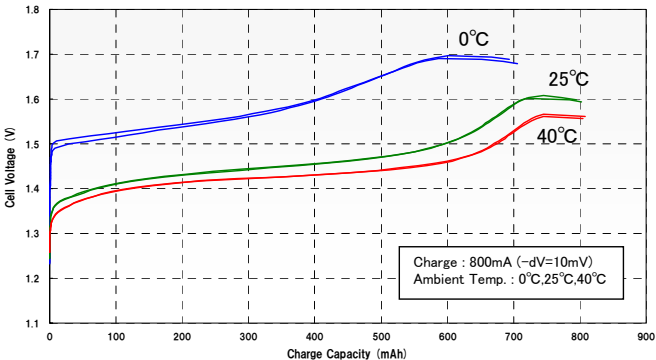

Discharge

