


	
Nominal Voltage	1.45 V
Rated Capacity	100 mAh at 3000 ohm to 1.1 V @ 21°C and 50% RH
Typical Impedance (Fresh)	9.0 ohm @ 1kHz
Typical Weight	0.3 g (0.01 oz)
Volume	0.08 cm ³ (0.005 in ³)
Terminals	Flat
Operating Temperature Range	0°C to 50°C (32°F to 122°F)
Recommended Storage Temperature	5°C to 30°C with 40-80% RH
Shelf Life	4 years unactivated @ 21°C
Designation	ANSI: 7005Z IEC: PR70



Typical Discharge Characteristics at 21°C (70°F) and 50% RH

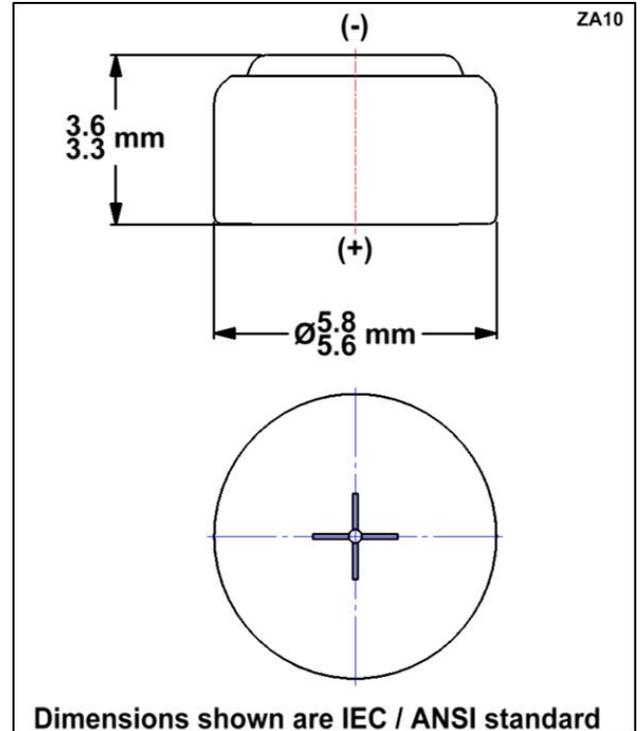